

Report of Test

LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.
Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).
Flat opal lens forms luminous opening of 72.1" x 0.75".

24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.


Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.



Performance Summary

Total Light Output	535 lm	Min Power Factor	0.56 @ 277 V
Luminaire Power	15.1 W	Max THD(i)*	23.6 % @ 277 V
Luminous Efficacy	35.4 lm/W	SC along*, across*	1.24 , 1.22
CCT	3480 K	SC Diagonal*	1.34
CIE(x,y)	(0.405, 0.386)		
CRI	86		
0-60° Zonal Flux %	81.2 %		


PREPARED FOR : Optolum Inc, Tempe AZ 85281



Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.
Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).
Flat opal lens forms luminous opening of 72.1" x 0.75".
24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.
One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.
Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.





Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.

Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).


Flat opal lens forms luminous opening of 72.1" x 0.75".

24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.

Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.

Legend: C0-Solid, C45-Dashed, C90-Grey (cd)

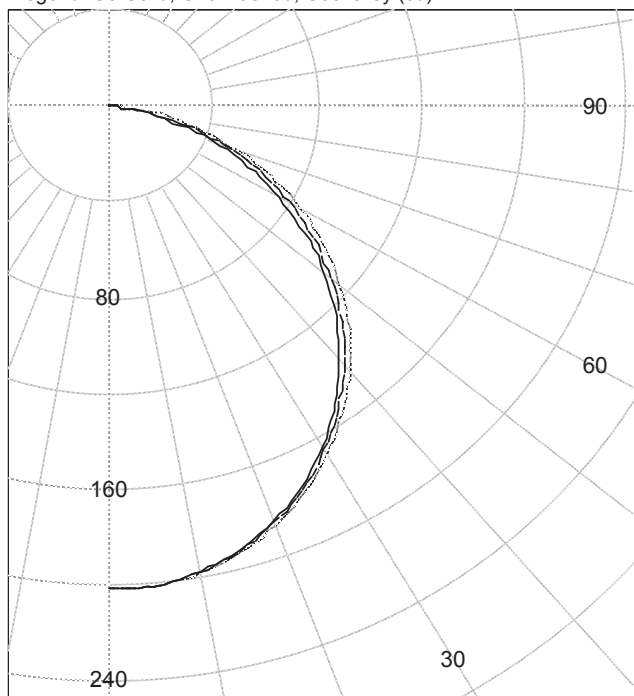

INTENSITY SUMMARY (cd)

Gamma	C-Plane					Flux (lm)
	C0	C22.5	C45	C67.5	C90	
0.0	202	202	202	202	202	
5.0	201	201	201	201	201	19
10.0	198	198	198	198	198	
15.0	192	192	193	193	193	54
20.0	185	185	185	186	186	
25.0	175	176	176	177	178	81
30.0	164	165	166	167	168	
35.0	151	152	154	155	157	96
40.0	138	139	141	143	144	
45.0	123	124	126	129	130	98
50.0	108	109	111	114	116	
55.0	92	93	96	98	100	86
60.0	76	77	80	83	84	
65.0	59	60	63	66	68	63
70.0	42	44	47	50	52	
75.0	25	27	31	34	35	32
80.0	10	11	15	18	19	
85.0	4	4	4	6	6	6
90.0	0	0	0	0	0	

ZONAL FLUX AND PERCENTAGES


Zone	Flux (lm)	% Lamp	% Luminaire
0-30	155	N / A	28.9
0-40	251	N / A	46.9
0-60	434	N / A	81.2
0-90	535	N / A	100.0
40-90	284	N / A	53.1
60-90	101	N / A	18.8
90-180	0	N / A	0.0
0-180	535	N / A	100.0

Total Light Output = 535 lm

Signed:

P. Lawrance
Authorized Signatory

Date of test 13-Jul-2014
Date of report 20-Aug-2014



Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.

Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).

Flat opal lens forms luminous opening of 72.1" x 0.75".


24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.

Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.

Intensity data (cd)

Gamma	C-Plane				
	C0	C22.5	C45	C67.5	C90
0.0	202	202	202	202	202
2.5	202	202	202	202	202
5.0	201	201	201	201	201
7.5	200	200	200	200	200
10.0	198	198	198	198	198
12.5	195	195	196	196	196
15.0	192	192	193	193	193
17.5	189	189	189	190	190
20.0	185	185	185	186	186
22.5	180	180	181	182	182
25.0	175	176	176	177	178
27.5	170	170	171	172	173
30.0	164	165	166	167	168
32.5	158	159	160	161	162
35.0	151	152	154	155	157
37.5	145	146	147	149	150
40.0	138	139	141	143	144
42.5	131	132	134	136	137
45.0	123	124	126	129	130
47.5	116	117	119	121	123
50.0	108	109	111	114	116
52.5	100	101	104	106	108
55.0	92	93	96	98	100
57.5	84	85	88	91	92
60.0	76	77	80	83	84
62.5	67	69	72	74	76
65.0	59	60	63	66	68
67.5	50	52	55	58	60
70.0	42	44	47	50	52
72.5	33	35	39	42	43
75.0	25	27	31	34	35
77.5	17	18	23	26	27
80.0	10	11	15	18	19
82.5	6	6	8	12	12
85.0	4	4	4	6	6
87.5	1	1	1	2	2
90.0	0	0	0	0	0



Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.

Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).

Flat opal lens forms luminous opening of 72.1" x 0.75".


24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.

Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.

Coefficients Of Utilization * - Zonal Cavity Method
Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	109	105	101	97	107	102	99	95	98	95	92	94	92	89	91	89	87	85	85	85	85
2	100	92	85	79	97	90	84	78	86	81	77	83	79	75	80	76	73	71	71	71	71
3	91	81	73	66	88	79	72	66	76	70	65	73	68	63	71	66	62	60	60	60	60
4	83	72	63	56	81	70	62	56	68	61	55	65	59	54	63	58	54	52	52	52	52
5	77	64	55	49	75	63	55	48	61	53	48	59	52	47	57	51	47	45	45	45	45
6	71	58	49	43	69	57	48	42	55	48	42	53	47	42	52	46	41	39	39	39	39
7	66	52	44	38	64	52	43	37	50	43	37	49	42	37	47	41	37	35	35	35	35
8	61	48	39	34	60	47	39	34	46	39	33	45	38	33	43	37	33	31	31	31	31
9	57	44	36	30	56	43	36	30	42	35	30	41	35	30	40	34	30	28	28	28	28
10	54	41	33	27	52	40	32	27	39	32	27	38	32	27	37	31	27	25	25	25	25



Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.
 Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).
 Flat opal lens forms luminous opening of 72.1" x 0.75".
 24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.
 One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.
 Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.


LM-79 Performance Data

Spectral	CIE 1931 (x, y) ⁽¹⁾	(0.405, 0.386)
	CIE 1976 (u', v') ⁽¹⁾	(0.237, 0.509)
	Correlated Color Temperature (CCT) ⁽¹⁾	3480 K
	Color Spatial Uniformity ⁽²⁾	0.0010
	Color Rendering Index (Ra) ⁽¹⁾	86
	Special CRI 9 (R ₉) ^{(1),(3)}	33
	Distance from Planckian Locus (Duv) ^{(1),(3)}	-0.0019
	Scotopic/Photopic Ratio ^{(1),(3)}	1.59
Electrical	Voltage	120 V (Setpoint 1)
	Frequency	60 Hz
	Current	0.141 A
	Power	15.1 W
	Power Factor	0.89
	Current THD	11.0 %
	Voltage	240 V (Setpoint 2)
	Frequency	60 Hz
	Current	0.123 A
	Power	16.5 W
Power Factor	0.56	
Current THD	23.6 %	

Performance data in accordance with IESNA LM-79-08. Spectral calculations are for a CIE 2° observer
 Photometric and spectral values were measured at Setpoint 1

- (1) Value is computed from the weighted average of the spatial measurements
- (2) Value is the maximum deviation of the spatial u' and v' measurements from the weighted average
- (3) Quantity is in addition to the scope of IESNA LM-79-08






Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.
 Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).
 Flat opal lens forms luminous opening of 72.1" x 0.75".
 24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.
 One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.
 Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.


LM-79 Performance Data

Summary Relative Spectral Irradiance Distribution (wavelength – nm, irradiance – relative to peak = 1)

380	4.98E-05	480	3.97E-01	580	9.40E-01	680	3.83E-01
385	7.27E-05	485	3.40E-01	585	9.62E-01	685	3.42E-01
390	3.95E-05	490	3.30E-01	590	9.80E-01	690	3.02E-01
395	7.94E-05	495	3.48E-01	595	9.92E-01	695	2.66E-01
400	8.33E-05	500	3.78E-01	600	9.99E-01	700	2.34E-01
405	1.96E-04	505	4.20E-01	605	9.98E-01	705	2.04E-01
410	9.75E-04	510	4.67E-01	610	9.89E-01	710	1.77E-01
415	3.64E-03	515	5.10E-01	615	9.72E-01	715	1.52E-01
420	9.12E-03	520	5.49E-01	620	9.49E-01	720	1.30E-01
425	2.16E-02	525	5.85E-01	625	9.16E-01	725	1.12E-01
430	4.53E-02	530	6.18E-01	630	8.79E-01	730	9.61E-02
435	8.92E-02	535	6.49E-01	635	8.34E-01	735	8.01E-02
440	1.64E-01	540	6.80E-01	640	7.89E-01	740	6.95E-02
445	2.94E-01	545	7.11E-01	645	7.36E-01	745	5.65E-02
450	5.41E-01	550	7.44E-01	650	6.85E-01	750	4.78E-02
455	8.55E-01	555	7.78E-01	655	6.32E-01	755	4.01E-02
460	9.47E-01	560	8.15E-01	660	5.81E-01	760	3.25E-02
465	7.55E-01	565	8.50E-01	665	5.28E-01	765	2.58E-02
470	5.97E-01	570	8.84E-01	670	4.75E-01	770	1.67E-02
475	4.97E-01	575	9.15E-01	675	4.29E-01	775	1.20E-02
						780	8.38E-03

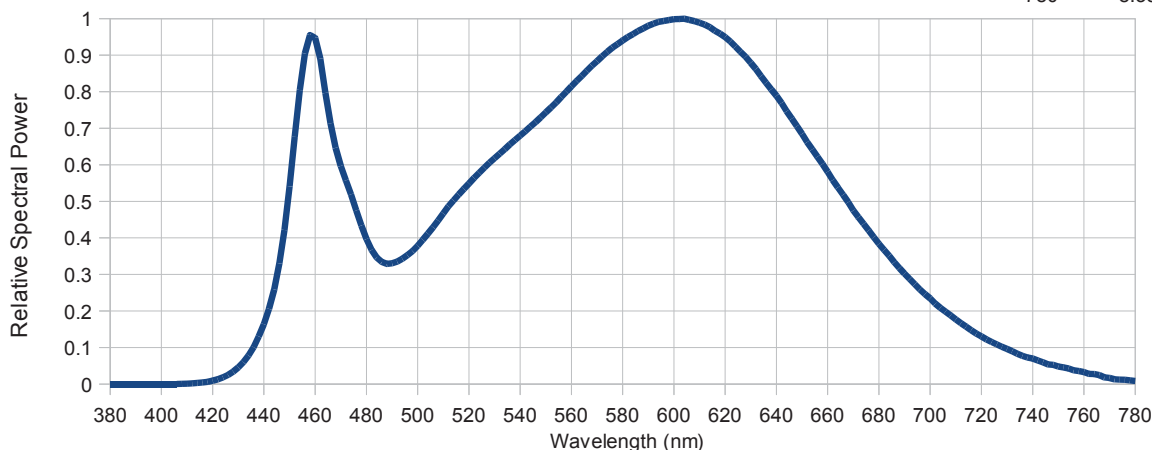

* The spectral power distribution combines the weighted spectral power distributions of all spatial measurements.



Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.

Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).

Flat opal lens forms luminous opening of 72.1" x 0.75".

24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.

Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.

LM-79 Performance Data

Spatial measurements (lower hemisphere)

Vertical angle (deg)	CIE 1976 (u',v') coordinates	
	Horizontal 0 plane	Horizontal 90 plane
0	(0.237, 0.509)	(0.237, 0.509)
10	(0.237, 0.509)	(0.237, 0.509)
20	(0.237, 0.509)	(0.237, 0.509)
30	(0.237, 0.509)	(0.237, 0.509)
40	(0.237, 0.509)	(0.237, 0.509)
50	(0.237, 0.509)	(0.237, 0.510)
60	(0.237, 0.509)	(0.238, 0.510)
70	(0.236, 0.509)	(0.238, 0.510)
80	I <= 10 %	I <= 10 %
-	-	-

Spatial measurements (upper hemisphere)

Vertical angle (deg)	CIE 1976 (u',v') coordinates	
	Horizontal 0 plane	Horizontal 90 plane
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

Test procedure

All measurements were performed in an environmentally controlled laboratory employing suitable baffling to minimize stray light. The sample was mounted in its normal operating orientation on a rotating mirror goniophotometer and operated from a stabilized supply. The photometric output was monitored and measurements were performed once stability was achieved.

The goniophotometer was used to measure the spatial distribution of both luminous intensity and, in conjunction with a spectroradiometer, spectral irradiance. The distribution locus comprises points in two or more planes (as indicated in the table above) at no more than 10° vertical intervals. The CIE (x,y) coordinates and other derived metrics (CIE (u', v'), CCT and CRI) are calculated from the weighted sum (weighted for intensity and represented solid angle) of the measured spectral irradiances.

Sample Orientation	Beam to nadir	Stabilization Time	0.75 hour
		Total Operation Time	4.5 hour

Equipment and uncertainties

LightLab International R80A C-gamma rotating mirror goniophotometer with a test distance of 8 m.

Luminous Intensity	± 4 %	Temperature	± 1 °C
Luminous Flux	± 4 %	Luminous Efficacy	± 4.5 %
Horizontal, Vertical Angles	± 0.25°		

PhotoResearch PR-670 spectroradiometer (380 - 780 nm., 2 nm. per pixel) measuring at a distance from the sample deemed greater than five times the maximum observed luminous opening dimension.

CIE (x, y) coordinates	± 0.003	CCT	± 100 K
CIE (u', v') coordinates	± 0.002	CRI (Ra)	± 3
Δ (u', v') Color difference	± 0.001	Scotopic / Photopic Ratio *	± 0.02
Relative Spectral Irradiance *	± 2 %	R9 *	± 3

Yokogawa WT210 power meter connected in circuit to the sample electrical supply

Voltage	± 0.5 %	Frequency *	± 0.1 Hz
Current	± 0.5 %	Power	± 0.5 %
Current THD *	± 3 %	Power Factor	± 0.02

This report contains data that are not covered by the NVLAP accreditation. Quantities marked with * are not covered. IESNA LM-79-08 Calculator v4.7 (13th Sep 2013)





Test Report No. LLI-14188-12D

Optolum "FineLine" Extruded Aluminum Luminaire. Cat No. FL-AL-L--358UOD-A072000.

Grey, triangular section aluminum housing, grey plastic end-caps (extent: 72.6" x 1.0" x 0.7" high).

Flat opal lens forms luminous opening of 72.1" x 0.75".

24 x 3" long white PCBs marked "Optolum FineLine LO Rev A1", each has six SMT LEDs at 0.5" centers.

One remote "High Perfection Tech LP1090-24-GG-290 100-240Vac 47-63Hz" driver.

Tested horizontally in free air at 120 V, 60 Hz with beam directed to nadir.

Test Distance: 8.0 metres

Test Temperature: 24.7 degrees Celsius

Significance: This laboratory has no control over the selection of samples to be tested. All testing is performed on the understanding that the significance of the report is limited to the extent that the test sample is representative of production units.

Test Procedure: Tested in accordance with the applicable sections of IESNA publication LM-79-08.

Notes: The luminous intensity values, and other derived quantities contained in this report are based on the absolute data, as tested.

Prorating the performance of the sample for the use of other component combinations (such as lamp / LED / Ballast / driver), or for use in different environmental conditions than that tested, may produce erroneous results.

This report is free of erasures and corrections.

Photometric intensity values are reported using the CIE Gamma coordinate system as defined in CIE publication number 121.

This report may contain data that are not covered by the NVLAP accreditation. Quantities marked with * are not covered.

Corrections have been applied to the photometric data to account for the sample luminous opening length exceeding 20% of the test distance.