


Specify	CL	8				
	LIGHT ENGINE BL - BriteLine FL - FineLine HO	LED COLOR Warm White 27 - 2700°K* 30 - 3000°K 35 - 3500°K 40 - 4000°K* Cool White 45 - 4500°K* 50 - 5000°K* <i>*special order color</i>	CRI 8 - 85 CRI	COATING C - Conformal Coating U - Uncoated	LENS S - Standard F - Film	LENGTH 3" multiples




Product Dimensions

End View - Actual Size



Side and Top Views - 1/2 = 1

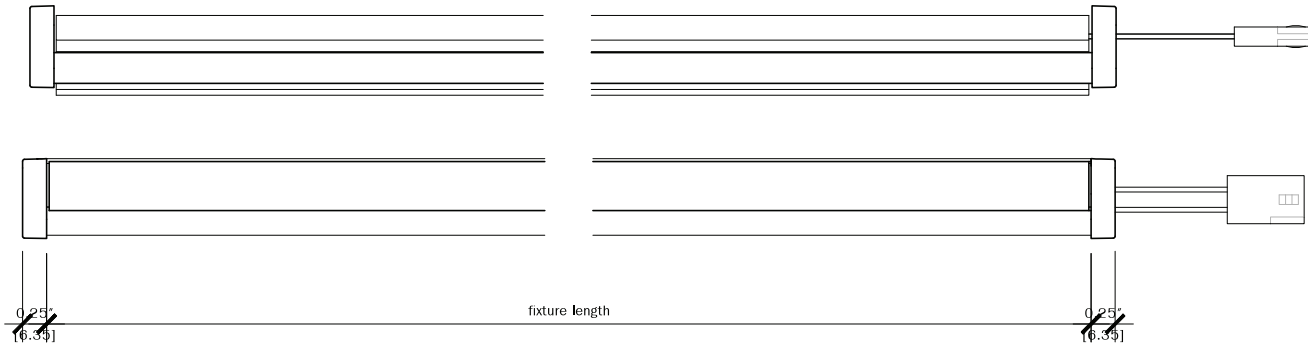

Item	Specification	B2-CL	FL-CL
Output	Lumens/ft	436 L/ft	250 L/ft
	Efficacy	64.59 L/W	55.5 L/W
	CRI	CRI 85	
Electrical*	Input Voltage	24 VDC	
	Power Consumption	7 W/ft	4.50 W/ft
Control	Dimming	Compatible with most 0-10 systems with <i>OptoLum 0-10 Interface</i>	
Physical	Dimensions	22.1mm X 21.34mm	
	Optic	-	
	Max length per power supply	13'-6" @ 96W 8'-6" @ 60W	21' @ 96W 13' @ 60W
Certification and Safety	Certification	UL	
	LED Class	Class 2 LED product	
	Environment	Dry Location	

Lamp Life and Warranty

Average Rated Lamp Life is 50,000 hours. Lamp life is derived from a formula that includes known LED tolerance and actual stress applied. OptoLum warrants our products for three years from the date of purchase against manufacturing defects.