

Specify **CL**

PRODUCT

ClothesLine is UL listed and approved for installation in the storage area of a clothes closet as defined by the 2008 NEC Article 410.

LED COLOR

Warm White
27 - 2700°K
30 - 3000°K
35 - 3500°K
40 - 4000°K*
Cool White
45 - 4500°K*
50 - 5000°K*

CONNECTION

D - Dead End
E - End to End

FINISH

A - Natural Clear
B - Brite Natural*
C - Black*
D - Medium Bronze*
O - Custom*
 *Nonstandard finishes available for additional cost

FIXTURE LENGTH


Fixture length is inclusive of mounting brackets and should represent the width of the finished space into which the ClothesLine fixture will be installed. Max fixture length is 10'-0"



Product Dimensions

*special order color

Scale 1/2 = 1

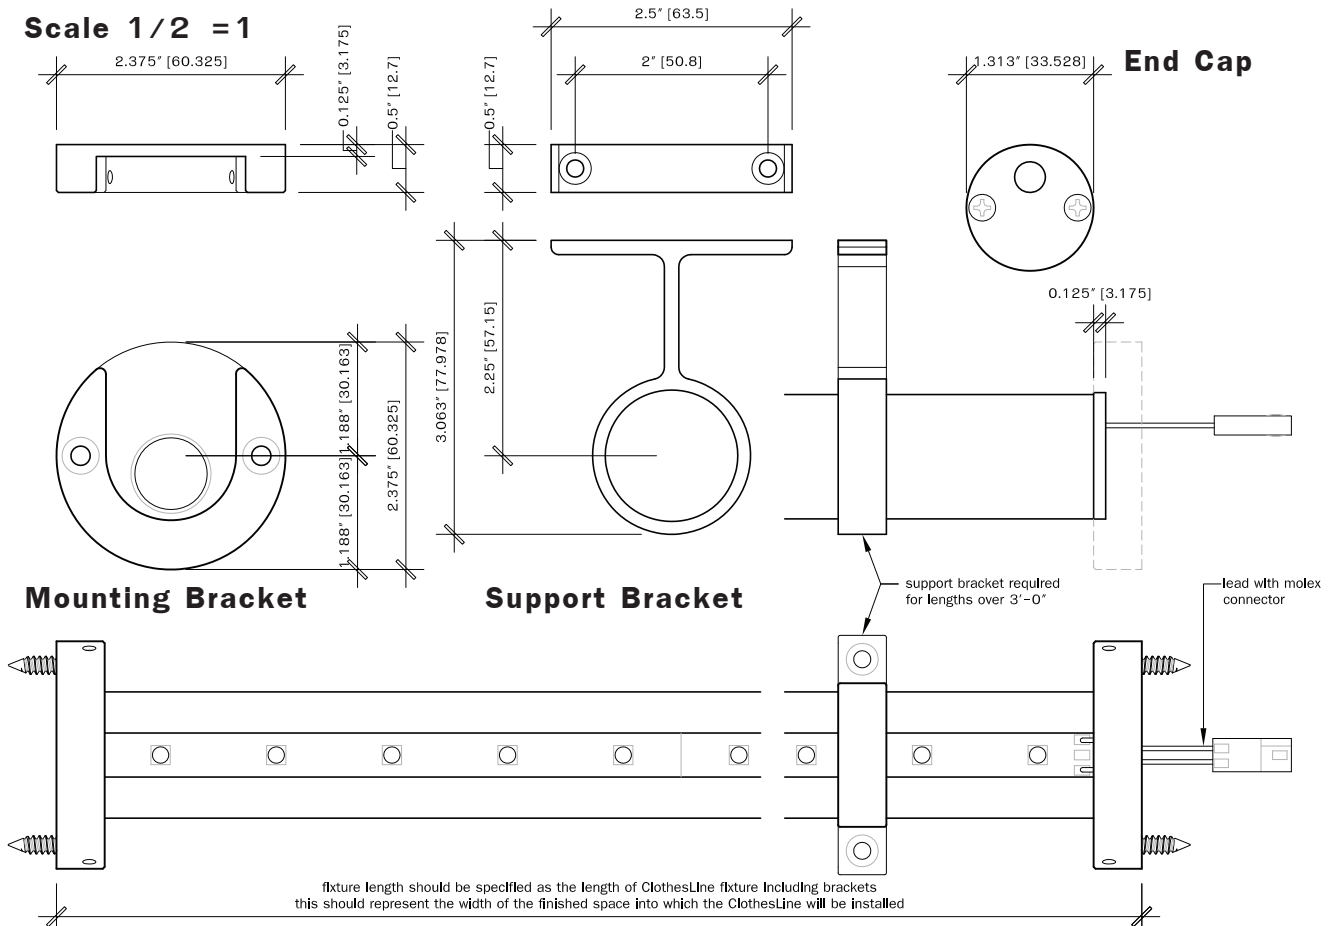

Options

Finishes and Mounting

The aluminum component pieces of ClothesLine come with a natural anodized finish. Additional custom order anodized finishes are available for an additional cost.

Each ClothesLine fixture will include two mounting brackets which include set screws to secure and focus the fixture within the brackets. Mounting screws and anchors are to be provided by the installer. If the fixture length exceeds 3'-0" intermediate support brackets will be provided for each successive 3' of length based on an anticipated load of 30 pounds per foot. Mounting screws and anchors for the intermediate support brackets are to be provided by the installer.

Electrical

OptoLum Low Voltage LED luminaires require OptoLum's remote power supplies, which must be ordered separately. ClothesLine can be wired in series.

Power Supply	W/Ft	60W	96W
ClothesLine	3.7	18'-0"	27'-0"

Control Systems

ClothesLine is compatible with most 0-10 dimming systems. All 0-10 interface devices and power supplies are ordered separately.

CRI 85 Nominal

ClothesLine is UL listed for Closet Locations

Item	Specification	ELSLO 3500K
Output*	Lumens/ft	192
	Efficacy	44 Lm/W
	CRI	CRI 85 Nominal
	Lumen Maintenance	50,000 hours with maintenance of 70% lumen output @25 °C
Electrical**	Input Voltage	24 VDC
	Power Consumption	3.7 W/ft maximum at steady state
Control	Dimming	Compatible with most 0-10 systems with an OptoLum 0-10 dimming interface
Physical	Dimensions	1.3" diameter rod with out mounting or support brackets
	Housing	Extruded aluminum, anodized finish
	Lens	Polycarbonate - contact a rep for additional options
	Fixture connectors	End to End or Dead End
	Ambient Operating Temperature	-20 ° - 50 °C (-4 ° - 122 °F)
	Max fixture run length per power supply	27' @ 96W 18' @ 60W
Certification and Safety	Certification	UL, CE
	LED Class	Class 2 LED product
	Environment	ClothesLine is UL listed and approved for installation in the storage area of a clothes closet as defined by the 2008 NEC Article 410.

© OptoLum Inc. April 2014 - OptoLum reserves the right to change specifications for product improvement without notification

* The data above is projected based on the LM79 testing of similar products in the EcoLine family, actual values may vary slightly. Please see our website for current data, IES files and additional color temperature data.

** Power consumption is inclusive of both the fixture and an OptoLum Power Supply.

Lamp Life and Warranty

Average Rated Lamp Life is 50,000 hours. Lamp life is derived from a formula that includes known LED tolerance and actual stress applied. OptoLum warranties our products for three years from the date of purchase against manufacturing defects.

