


Specify FLRO

PRODUCT	INTENSITY	LED COLOR	COATING	LENS	CONNECTION	FINISH	LENGTH
	S - SLO L - LO H - HO	Warm White 27-2700°K 30-3000°K 35-3500°K 40-4000°K* Cool White 45-4500°K* 50-5000°K* <i>*special order color</i>	U - Uncoated C - Conformally Coated	6 -60 Degree 3 -30 Degree 2 -15 Degree	D -Dead End E -End to End	C -Black* <i>*Standard black finish only</i>	FLSLO 6" Multiples FLO 3" Multiples FLHO 1.33" Multiples




Product Dimensions

End Views - Actual Size

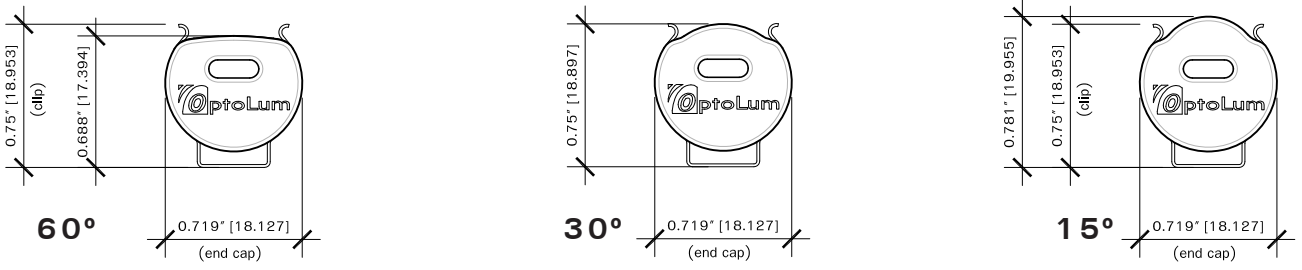

Side and Top Views - 1/2 = 1

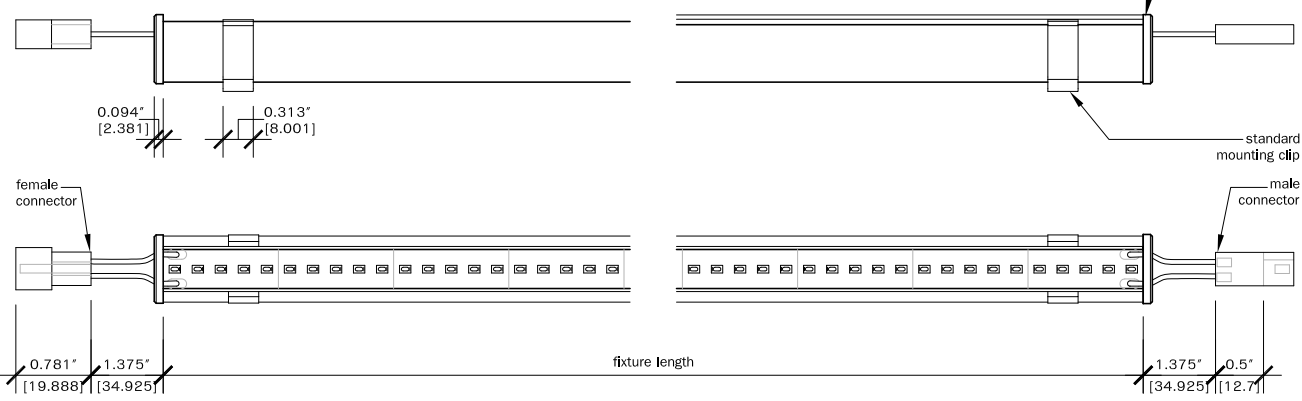

Options

Lenses

FineLine Round with optic may be specified to yield a 15°, 30° or 60° degree beam angle. OptoLum recommends a lens be specified unless a secondary enclosure for the fixture exists, such as a display case or architectural housing.

Coating

An optional conformal coating may be specified. This coating is optically clear and is applied over the circuitry and LEDs prior to final assembly to add a degree of protection to the circuit from environmental elements.

Control Systems

FineLine Round with optic is compatible with most 0-10 dimming systems. All 0-10 interface devices and power supplies are ordered separately.

Finishes and Mounting

FineLine Round with optic comes with a black anodized finish. FineLine Round O comes lensed with black end caps, and stainless steel mounting clips. For additional mounting options please see the Mounting Options Spec Sheet.

Electrical

OptoLum Low Voltage LED luminaires require OptoLum's remote power supplies, which must be ordered separately. FineLine Round with optic can be wired in series.

Power Supply	W/ft	60W	96W
FineLine SLO	1.25	48'-0"	76'-6"
FineLine LO	2.5	24'-0"	38'-0"
FineLine HO	4.5	13'-0"	21'-0"

© OptoLum Inc. January 2014 - OptoLum reserves the right to change specifications for product improvement without notification

Item	Specification	FLHO 3000K 15 Degree	FLHO 3000K 30 Degree	FLHO 3000K 60 Degree
Output*	Lumens/ft	85.83	112.5	138.17
	Efficacy	19 Lm/W	25 Lm/W	30.7 Lm/W
	CRI	CRI 85 nominal		
	Lumen Maintenance	50,000 hours with maintenance of 70% lumen output @25 °C		
Electrical**	Input Voltage	24 VDC		
	Power Consumption	4.5 W/ft maximum at steady state for HO		
Control	Dimming	Compatible with most 0-10 systems with an OptoLum 0-10 dimming interface		
Physical	Dimensions	0.719" O.D., Length 1.3" multiples - HO		
	Housing	Extruded aluminum, anodized finish		
	Lens	Optional polycarbonate - contact a rep for additional options		
	Fixture connectors	End to End or Dead End		
	Ambient Operating Temperature	-20 ° - 50 °C (-4 ° - 122 °F)		
	Max fixture run length per power supply - HO option	21' @ 96W		
		13' @ 60W		
Certification and Safety	Certification	UL, CE		
	LED Class	Class 2 LED product		
	Environment	Dry Location		

© OptoLum Inc. January 2014 - OptoLum reserves the right to change specifications for product improvement without notification.

* Estimates have been included in the illumination data pending LM79 testing results; actual illumination may vary from these estimates.

** Power consumption data does not include the power supply and may vary slightly.

Lamp Life and Warranty

Average Rated Lamp Life is 50,000 hours. Lamp life is derived from a formula that includes known LED tolerance and actual stress applied. OptoLum warrants our products for three years from the date of purchase against manufacturing defects.

