

Specify **iS**

PRODUCT

OPTIC

14°
16°
24°
48°
EL-(40°x14°)

LED COLOR

Warm White
27 -2700°K
30 -3000°K
35 -3500°K
40 -4000°K*
Cool White
45 -4500°K*
50 -5000°K*
*special order color

FINISH


A -Natural Clear
C -Black*
D -Medium Bronze*
O -Custom*
*Nonstandard finishes available for additional cost

MOUNTING

O1 -Standard 1/2" stem
O2 -Custom

Product Dimensions

Actual Size - Standard Mounting

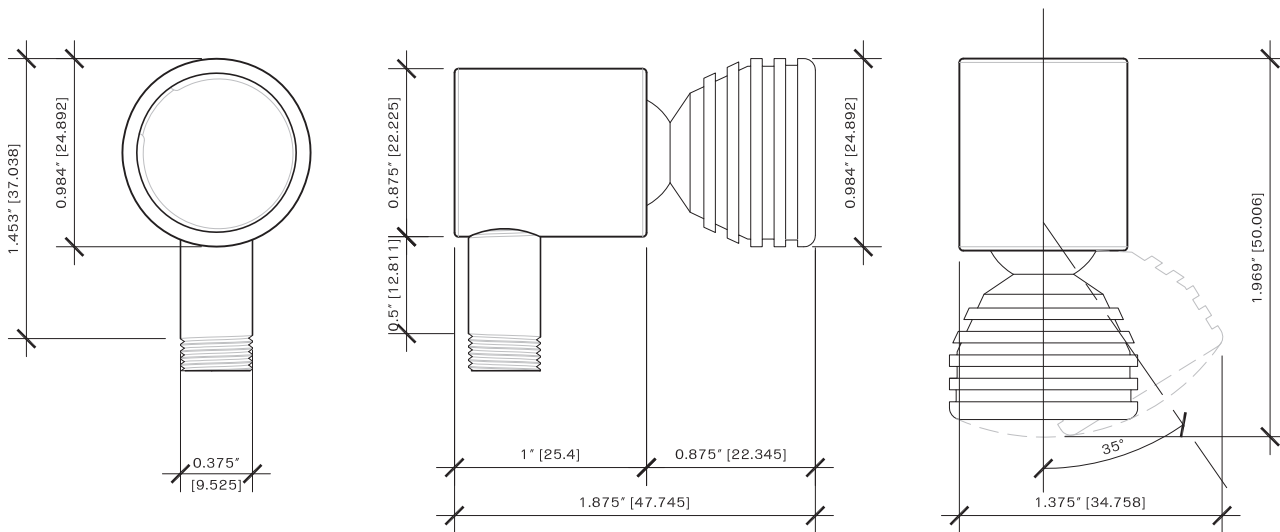

Options

Lenses

iSpot may be specified with one of four different beam spreads, 14°, 16°, 24°, 48° and 40°x14°. OptoLum uses the highest quality optical grade PMMA lenses.

Finishes and Mounting

The standard iSpot Aluminium Housing comes with a natural anodized finish. Additional custom order anodized finishes are available for an additional cost.

The Standard iSpot mounting comes with a 1/2" long x 3/8" diameter threaded stem as shown above. Custom mounting options may be accommodated. Please coordinate custom mounting with OptoLum and your Rep.

Electrical

OptoLum Low Voltage LED luminaires require OptoLum's remote constant current supplies, which must be ordered separately. Each iSpot uses 1.2W and runs at 350mA.

Power Supply	W/Luminaire	WH-103U-350	LED-10CC-350-PU	WH-L121-350
iSpot Heads	1.2	2	6-8	8-10

*For other configurations please contact your optolum rep.

Lamp Life and Warranty

Average Rated Lamp Life for iSpot is 50,000 hours. Lamp life is derived from a formula that includes known LED tolerance and actual stress applied. OptoLum warranties our products for three years from the date of purchase against manufacturing defects.