OPTOLUM

T: 480-968-2500
F: 480-968-3005
1407 W 10th Place Suite 107
Tempe, AZ 85018

TYPE:

BRITELINE H-CHANNEL

HIGHLIGHTS

STANDARD **CRI 90+** NOMINAL

Wet Location	Power Consumption 7.41 W/ft (24.31 W/m)	IP 67	*Product tested at 3000K, 90+CRI
			** Wattage is inclusive of power supply
	Input Voltage	24 VDC	50,000 hours of maintenance of 70% Lumen output at 25 °C

DATE:

PROJECT:

FIRM:

NOTES:

PRODUCT DIMENSIONS

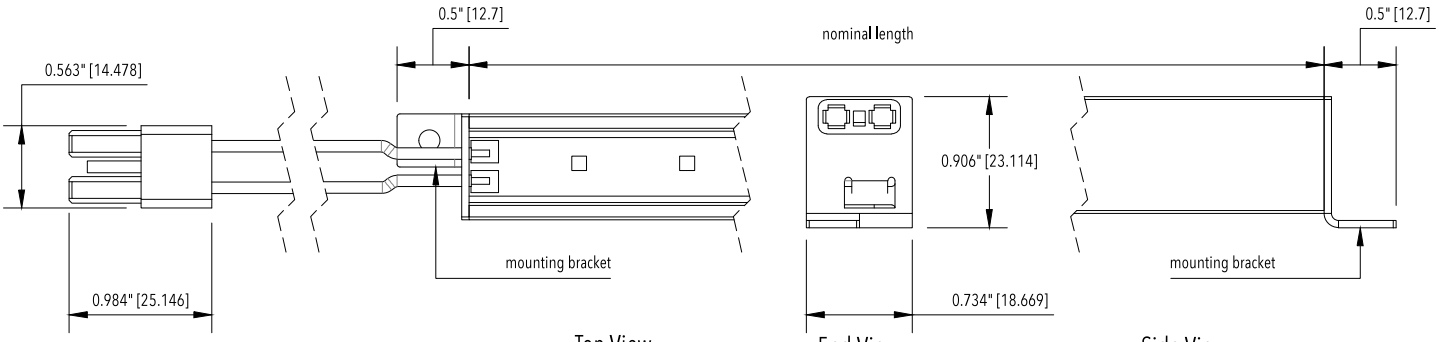

Top View | End View | Side View

SPECIFY

Example: **BL-HCZ---309--D--060000**

B2	-	HCZ	-	--		-	-		-	-	

PRODUCT

COLOR TEMPERATURE

- **22 8** 2200K*
- **24 8** 2400K*
- **27 9** 2700K
- **30 9** 3000K
- **35 9** 3500K
- **40 9** 4000K
- **45 9** 4500K*
- **50 9** 5000K*

**CRI 85 nominal, may require additional lead time*

CONNECTION

- **D** Dead End
- **E** End to End

LENGTH

Please specify nominal length in 3" increments up to 60"

ACCESSORIES

PS	select supply	dimming	# of leads	2--	IP rating
	JUMPERS				

POWER SUPPLIES Complete information can be found on Power Supply Spec Pages

UL CLASS 2	*IP65*	*INPUT 110-277 VAC*
	RATED POWER	RUN LENGTH PER SUPPLY
PS060X277-	60 W	7.7 ft (2.4 m)
PS100X277-	100 W	12.8 ft (3.9 m)
PS100-ELV-	100 W	12.8 ft (3.9 m)
INTEGRAL J-BOX		
PS100-277-	100 W	12.8 ft (3.9 m)

**Quantity of Power Supplies may change based upon layout.*

PRINT

© OPTOLUM Inc. September 2016 | OPTOLUM reserves the right to change specifications for product improvement without notification

OPTOLUM.COM