

TYPE PROJECT FIRM DATE

ISPOT
Point Source




iSpot is an adjustable mini spot light, with a variety of beam angles. iSpot is suitable for an array of showcase applications.

- + Standard CRI 90+ Nominal

	350 mA	700 mA
Lumen Output*	116 lm/fixture	197 lm/fixture
Power Consumption**	1.74 W/fixture	3.62 W/fixture
Efficacy	66.7 lm/W	54.4 lm/W
Input Voltage	350 mA	700 mA
Dimensions (ØD x D)	0.984" x 1.875"	
Full Width Half Max	60°(H) x 80°(V)	
Uniformity	3-Step MacAdam Ellipse	
Operating Temp	50°C (122°F) Max	
Materials	Extruded Aluminium	
Dimming	Flicker-Free down to 0.1%	

* Data has been interpolated from the LM 79 testing of similar OPTOLUM products at 3000K, 14 degree lens and 90+ CRI, actual values may differ
 ** Wattage is inclusive of power supply
 50,000 hours of maintenance of 70% Lumen output at 25°C

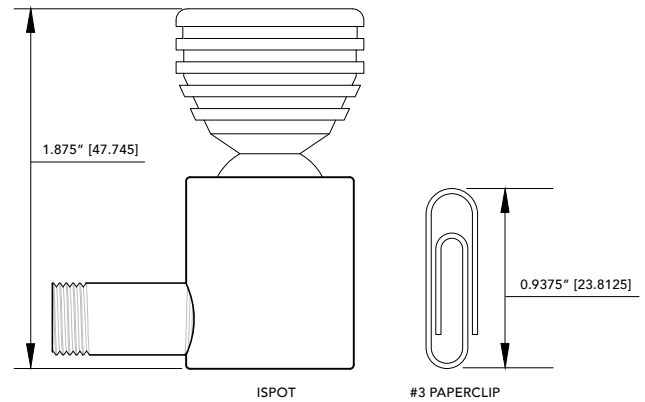

ACTUAL SIZE COMPARISON

ISPOT ORDERING CODE Example: IS14279A01

PRODUCT	OPTIC	COLOR TEMP	FINISH	MOUNTING
IS ISPOT	14 14° 16 16° 24 24° 48 48° EL 40°x14°	27 9 2700K 30 9 3000K 35 9 3500K 40 9 4000K* 45 9 4500K* 50 9 5000K* *special order color	A Natural Clear C Black* D Medium Bronze* O Custom* *nonstandard finishes available for additional cost	01 Standard 1/2" stem 02 Custom

ISPOT PRODUCT DIMENSIONS

