



Specify	ELRO					C	
PRODUCT	INTENSITY	LED COLOR	COATING	LENS	CONNECTION	FINISH	LENGTH
S-SLO L-LO	S-SLO L-LO *For HO option please refer to BriteLine2 Round Spec sheet	Warm White 27-2700°K 30-3000°K 35-3500°K 40-4000°K* Cool White 45-4500°K* 50-5000°K*	U -Uncoated C -Conformally Coated	6 -60 Degree 3 -30 Degree 2 -15 Degree	D-Dead End E-End to End	C-Black* *Standard black finish only	ECO SLO 6" Multiples ECO LO 6" Multiples

Product Dimensions

End Views - Actual Size

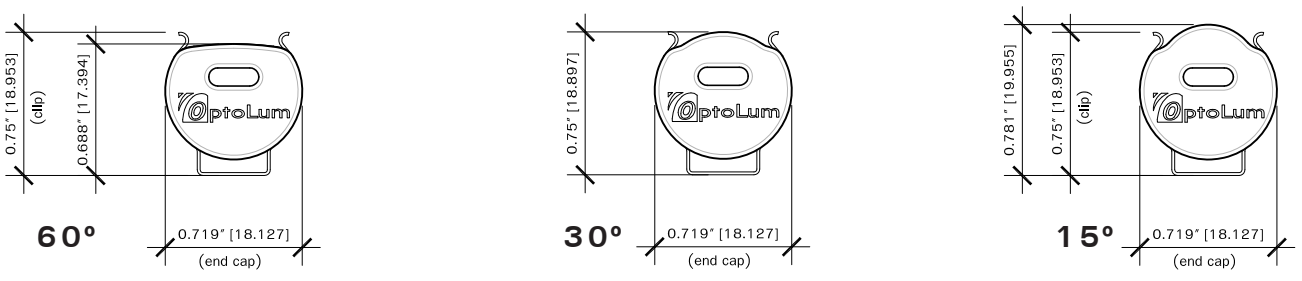

Side and Top Views - 1/2 = 1

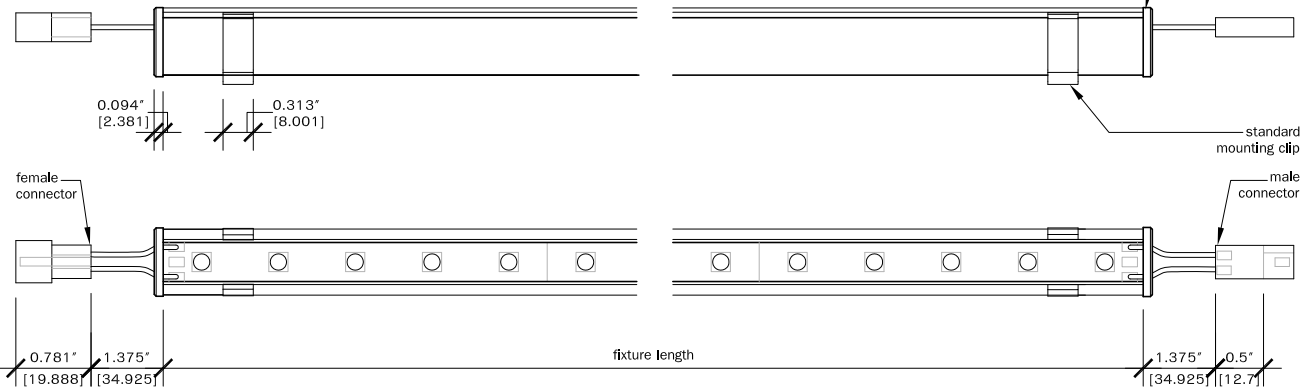

Options

Lenses

EcoLine Round with optic may be specified to yield a 15°, 30° or 60° degree beam angle. OptoLum recommends a lens be specified unless a secondary enclosure for the fixture exists, such as a display case or architectural housing.

Finishes and Mounting

EcoLine Round with optic comes with a black anodized finish. EcoLine Round with optic comes lensed with black end caps, and stainless steel mounting clips. For additional mounting options please see the Mounting Options Spec Sheet.

Coating

An optional conformal coating may be specified. This coating is optically clear and is applied over the circuitry and LEDs prior to final assembly to add a degree of protection to the circuit from environmental elements.

Control Systems

EcoLine Round with optic is compatible with most 0-10 dimming systems. All 0-10 interface devices and power supplies are ordered speratly.

Electrical

OptoLum Low Voltage LED luminaires require OptoLum's remote power supplies, which must be ordered separately. EcoLine Round with optic can be wired in series.

Power Supply	W/ft	60W	96W
EcoLine SLO	3.7	16'-0"	25'-6"
EcoLine LO	8	7'-6"	12'-0"

HO option

For a HO option, please refer to BriteLine 2 Round.

© OptoLum Inc. January 2014 - OptoLum reserves the right to change specifications for product improvement without notification

Item	Specification	ELSLO 3500K 15 Degree	ELSLO 3500K 30 Degree	ELSLO 3500K 60 Degree
Output*	Lumens/ft	120	159	185
	Efficacy	15 Lm/W	19.8 Lm/W	23 Lm/W
	CRI	CRI 85 nominal		
	Lumen Maintenance	50,000 hours with maintenance of 70% lumen output @25 °C		
Electrical**	Input Voltage	24 VDC		
	Power Consumption	3.7 W/ft maximum at steady state for SLO		
Control	Dimming	Compatible with most 0-10 systems with an OptoLum 0-10 dimming interface		
Physical	Dimensions	0.719" O.D., length 6" multiples		
	Housing	Extruded aluminum, anodized finish		
	Lens	Optional polycarbonate - contact a rep for additional options		
	Fixture connectors	End to End or Dead End		
	Ambient Operating Temperature	-20 ° - 50 °C (-4 ° - 122 °F)		
	Max fixture run length per power supply - SLO option	25'-6" @ 96W		
		16' @ 60W		
Certification and Safety	Certification	UL, CE		
	LED Class	Class 2 LED product		
	Environment	Dry Location		

© OptoLum Inc. January 2014 - OptoLum reserves the right to change specifications for product improvement without notification

* Estimates have been included in the illumination data pending LM79 testing results; actual illumination may vary from these estimates.

** Power consumption data does not include the power supply and may vary slightly.

Lamp Life and Warranty

Average Rated Lamp Life is 50,000 hours. Lamp life is derived from a formula that includes known LED tolerance and actual stress applied. OptoLum warrants our products for three years from the date of purchase against manufacturing defects.

