

OPTOLUM

TYPE:

T: 480-968-2500
F: 480-968-3005

1407 W 10th Place Suite 107
Tempe, AZ 85018

ECOLINE LOW PROFILE MO

HIGHLIGHTS

STANDARD **CRI 90+** NOMINAL

DATE: _____

Minimal Clearance

Lumen Output*	235.4 Lm/ft (772 Lm/m)
Power Consumption**	2.96 W/ft (9.71 W/m)
Efficacy	80 Lm/W
Input Voltage	24 VDC

* Data has been interpolated from the LM 79 testing of similar OptoLum products at 3000K and 90+ CRI, actual values may differ.
** Wattage is inclusive of power supply.

50,000 hours of maintenance of 70% Lumen output at 25 °C




PROJECT: _____

FIRM: _____

PRODUCT DIMENSIONS

NOTES: _____

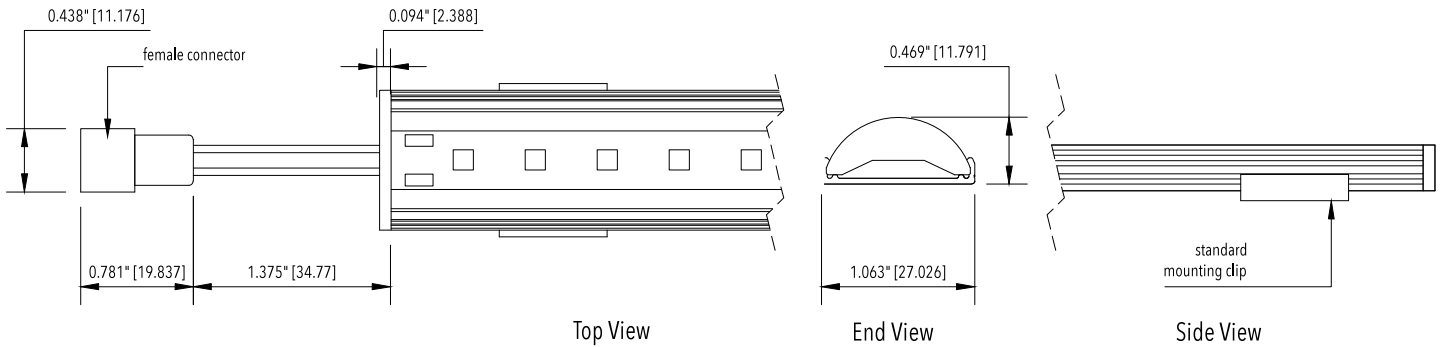

SPECIFY

Example: **EL-LP-M--309USD-A060000**

EL	-	LP-	M	--															
-----------	---	------------	----------	----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

PRODUCT

COLOR TEMPERATURE

- 20 8** 2000K*
- 22 8** 2200K*
- 24 8** 2400K*
- 27 9** 2700K
- 30 9** 3000K
- 35 9** 3500K
- 40 9** 4000K
- 45 9** 4500K*
- 50 9** 5000K*

COATING

- U** Uncoated Standard
- for damp location specify:*
- C** Coated

LENS

- S** Standard
- O** Opal

CONNECTION

- D** Dead End
- E** End to End

FINISH

- A** Natural
- C** Black*
- D** Bronze*

**Special order available for additional cost*

LENGTH

Please specify nominal length in 4" increments up to 120"

*CRI 85 nominal, may require additional lead time

ACCESSORIES

PS					2--	
JUMPERS						

POWER SUPPLIES Complete information can be found on Power Supply Spec Pages

UL CLASS 2	IP65	INPUT 110-277 VAC
RATED POWER RUN LENGTH PER SUPPLY*		
PS060X277-	60 W	19.3 ft (5.9 m)
PS100X277-	100 W	32.1 ft (9.8 m)
PS100-ELV-	100 W	32.1 ft (9.8 m)
INTEGRAL J-BOX		
PS100-277-	100 W	32.1 ft (9.8 m)

*Quantity of Power Supplies may change based upon layout.