


TYPE PROJECT FIRM DATE

OPTOLINE AC WET

Exterior Rated Grazer




OptoLine AC WET is an exterior rated line voltage version of our OptoLine product. It is a compact, grazer with various beam angle and mounting options.

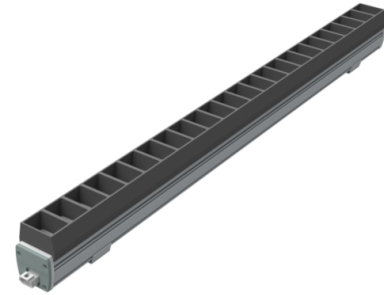

- + Narrow, Medium, Wide Beam and Elliptical Beam Angles
- + CCT Temps from 2700K-5000K
- + Retractable connectors for continuous row mounting
- + IP 67 outdoor rating

	LO	MO	HO
Lumen Output*	280 lm/ft (918 lm/m)	650 lm/ft (2130 lm/m)	1000 lm/ft (3281 lm/m)
Power Consumption**	4 W/ft (22.97W/m)	9 W/ft (42.65W/m)	10-12 W/ft (42.65W/m)
Efficacy	70 lm/W	72 lm/W	83 lm/W
Input Voltage	120V ONLY		
Dimensions (H x W)	2.530" x 2.153"		
Beam Angles	12°, 16°, 24°, 48°, 14° x 40°		
Uniformity	3-Step MacAdam Ellipse		
Operating Temp	50°C (122°F) Max		
Materials	Corrosion Resistant; Anodized Aluminum; UV Resistant		
Dimming	Forward and Reverse Phase Dimming (ELV, MLV, TRIAC)		

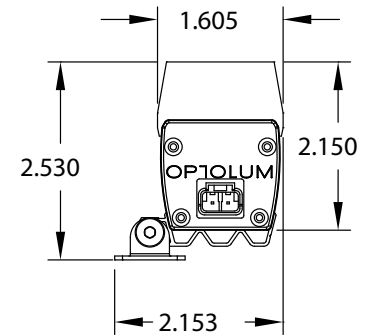

* Data has been interpolated from the LM 79 testing of similar OPTOLUM products at 3000K and 90+ CRI, actual values may differ
 ** Wattage is inclusive of power supply
 50,000 hours of maintenance of 70% Lumen output at 25°C

OPTOLINE AC WET ORDERING CODE Example: OLW-120V-L-01122701012400

PRODUCT	POWER	OUTPUT	MOUNTING	OPTIC	COLOR TEMP	ACCESSORIES	LENS	LENGTH
OLW Optoline AC WET	120V 120V	L LO M MO H HO	01 Fixed Clip 02 Rotational Clip 03 Pendant	12 12° 16 16° 24 24° 48 48° EL 14° x 40°	27 2700K 30 3000K 35 3500K 40 4000K 45 4500K* 50 5000K*	-- None 01 Louvre	01 Standard	2400 24" 3600 36" 4800 48"

*may require additional lead time

OPTOLINE AC WET ACCESSORIES

	LENGTH
LDR Leader Cable (Sold Separately)	10'
	LENGTH
JMPR Jumper Cable (Sold Separately)	2' 5' 10'

TYPE _____ PROJECT _____ FIRM _____ DATE _____

OPTOLINE AC WET PRODUCT DIMENSIONS

