

TYPE PROJECT FIRM DATE

OPTOLINE AC

Grazer




OptoLine AC is a line voltage version of our OptoLine product. It is a compact, interior-rated grazer with various beam angle and mounting options.

- + Standard CRI 90+ Nominal



	OPTOLINE AC LO	OPTOLINE AC HO
Lumen Output*	500 lm/ft (1640 lm/m)	1000 lm/ft (3281 lm/m)
Power Consumption**	7 W/ft (22.97W/m)	13 W/ft (42.65W/m)
Efficacy	70 lm/W	75 lm/W
Input Voltage	120V, 277V, 240V	
Dimensions (H x W)	1.387" x 1.498"	
Full Width Half Max	60°(H) x 80°(V)	
Uniformity	3-Step MacAdam Ellipse	
Operating Temp	25°C (77°F) Max	
Materials	Corrosion Resistant; Anodized Aluminum	
Dimming	Forward and Reverse Phase Dimming, ELV, MLV, TRIAC	

* Data has been interpolated from the LM 79 testing of similar OPTOLUM products at 3000K and 90+ CRI, actual values may differ
 ** Wattage is inclusive of power supply
 50,000 hours of maintenance of 70% Lumen output at 25°C

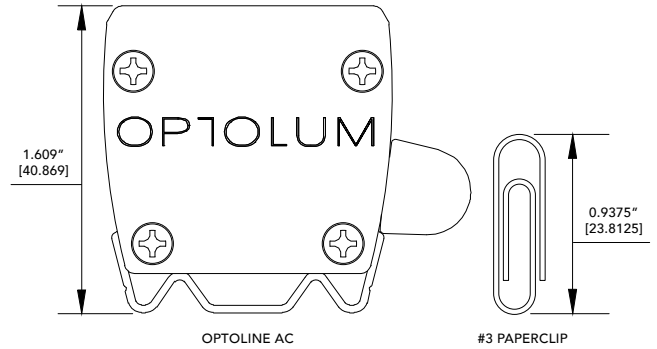

ACTUAL SIZE COMPARISON

OPTOLINE AC ORDERING CODE Example: OL--120L-012430--013600

PRODUCT	OUTPUT	MOUNTING	OPTIC	COLOR TEMP	ACCESSORIES	LENS	LENGTH
	-- 120	-					
OL Optoline	L LO 7W/ft H HO 13W/ft	01 Fixed Clip 02 Rotational Clip 03 Pendant	12 12° 16 16° 24 24° 48 48° EL 14° x 40°	27 2700K 30 3000K 35 3500K 40 4000K 45 4500K* 50 5000K*	-- None 01 Louvre	01 Standard 02 Opal	1200 12" 2400 24" 3600 36" 4800 48"

*may require additional lead time

TYPE _____ PROJECT _____ FIRM _____ DATE _____

OPTOLINE AC PRODUCT DIMENSIONS

