

TYPE PROJECT FIRM DATE

PL
Point Source




PL is a compact high intensity, pivoting low voltage, spot light. It is idea for display cases, museum art and retail applications.

- + Standard CRI 90+ Nominal

PL	
Lumen Output*	267 lm/ft (875.5 lm/m)
Power Consumption**	3.51 W/ft (11.51 W/m)
Efficacy	77 lm/W
Input Voltage	24 VDC
Dimensions (W x L)	3" x 1.42"
Full Width Half Max	60°(H) x 80°(V)
Uniformity	3-Step MacAdam Ellipse
Operating Temp	50°C (122°F) Max
Materials	Extruded Aluminium
Dimming	Flicker-Free down to 0.1%

* Data has been interpolated from the LM 79 testing of similar OPTOLUM products at 3000K and 90+ CRI, actual values may differ
 ** Wattage is inclusive of power supply

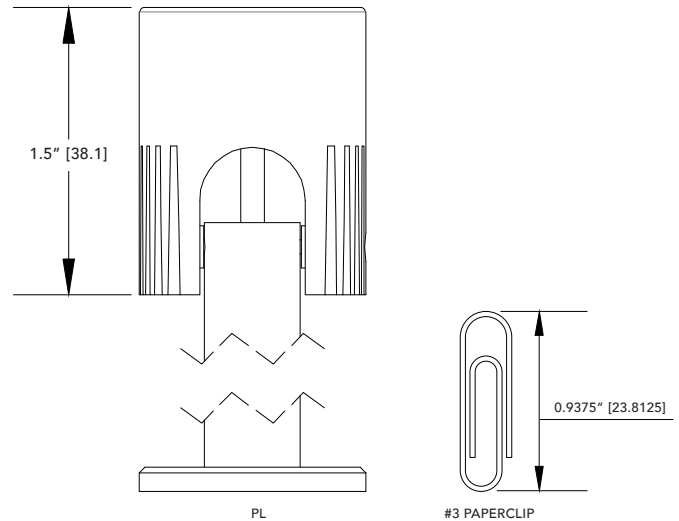

ACTUAL SIZE COMPARISON

PL ORDERING CODE Example: IS14279A01

PRODUCT	OPTIC	COLOR TEMP	FINISH	STEM LENGTH
S --- 3				
PL PL	26 26° 39 39° EL 43°+24°	27 9 2700K 30 9 3000K 35 9 3500K 40 9 4000K 45 9 4500K* 50 9 5000K*	A Natural Clear C Black D Bronze	006000 up to 6" 012000 6"-12" 018000 12"-18" 024000 18"-24" Specified height is nominal, please specify the actual installed fixture height with the installation details below
		*these colors may require additional lead time		

TYPE _____ PROJECT _____ FIRM _____ DATE _____

PL PRODUCT DIMENSIONS

