OPTOLUM

T: 480-968-2500
F: 480-968-3005
1407 W 10th Place Suite 107
Tempe, AZ 85018

TYPE:

ECOLINE ROUND LO

HIGHLIGHTS

STANDARD **CRI 90+** NOMINAL

Aimable Customizable Low Wattage

Lumen Output*	166.3 Lm/ft (546 Lm/m)
Power Consumption**	2.26 W/ft (7.41 W/m)
Efficacy	73 Lm/W
Input Voltage	24 VDC

** Data has been interpolated from the LM 79 testing of similar OptoLum products at 3000K and 90+ CRI, actual values my differ.*

*** Wattage is inclusive of power supply.*

50,000 hours of maintenance of 70% Lumen output at 25 °C

c UL us CE

DATE:

PROJECT:

FIRM:

NOTES:

PRODUCT DIMENSIONS

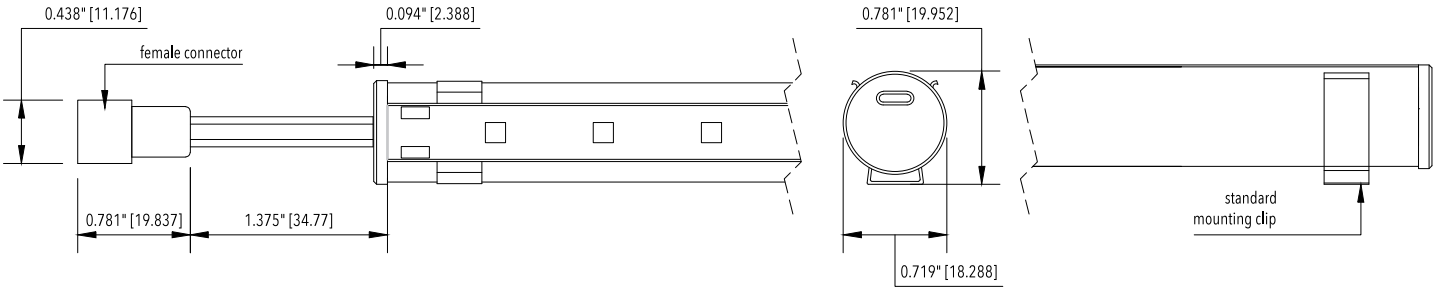

Top View | End View | Side View

SPECIFY

Example: **EL-RD-L--309USD-A060000**

EL		RD-	L	--						-		

PRODUCT

MOUNTING
- `-` Standard Mounting Clips
- **Y** Cylinder*
- **C** Corner*

*Please specify overall fixture length and height below

COLOR TEMPERATURE
- **20 8** 2000K*
- **22 8** 2200K*
- **24 8** 2400K*
- **27 9** 2700K
- **30 9** 3000K
- **35 9** 3500K
- **40 9** 4000K
- **45 9** 4500K*
- **50 9** 5000K*

**CRI 85 nominal, may require additional lead time*

COATING
- **U** Uncoated Standard

for damp location specify:
- **C** Coated

LENS
- **S** Standard
- **O** Opal
- **U** Unlensed

CONNECTION
- **D** Dead End
- **E** End to End

FINISH
- **A** Natural
- **B** Brite*
- **C** Black*
- **D** Bronze*

**Special order available for additional cost*

LENGTH

Please specify nominal length in 6" increments up to 120"

Specify actual installed fixture length below

MOUNTING

LENGTH	HEIGHT

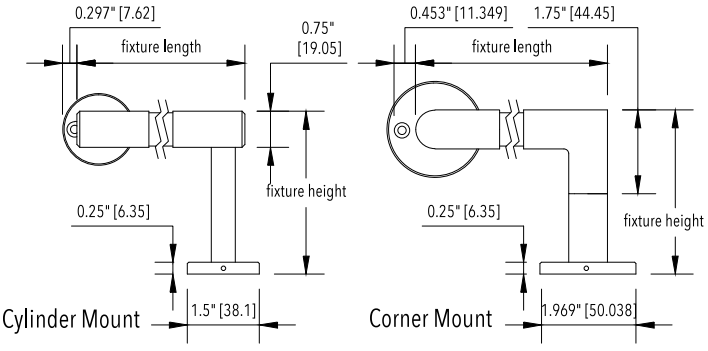

ACCESSORIES

PS	select supply	dimming	# of leads	2--	IP rating
	JUMPERS				

POWER SUPPLIES

Complete information can be found on Power Supply Spec Pages

UL CLASS 2	*IP65*	*INPUT 110-277 VAC*
	RATED POWER	RUN LENGTH PER SUPPLY*
PS060X277-	60 W	25.2 ft (7.7 m)
PS100X277-	100 W	42.0 ft (12.8 m)
PS100-ELV-	100 W	42.0 ft (12.8 m)
INTEGRAL J-BOX		
PS100-277-	100 W	42.0 ft (12.8 m)

**Quantity of Power Supplies may change based upon layout.*

PRINT

© OPTOLUM Inc. August 2016 | OPTOLUM reserves the right to change specifications for product improvement without notification

OPTOLUM.COM